



AX5 TriplePAR™

Data sheet

Optical

Colours
RGBAW

Total LED power
45W

Luminous Flux
1080Lm*

Emittance (@2m)
4800Lx*

CRI
92

Strobe
0-25Hz

Beam Angle
13°

Pixels
1

Construction

Housing
Aluminium

IP Rating
IP65

Relative humidity
0-100%

Operating Temperature
0-40 °C
32-104 °F

Weight
3.4kg

Dimensions
141 x 190 x 214 (mm)

Accessories

-  IR remote control
ARC1
-  32° Flood filter
AX5-FF(included)
-  17°x 46° Wallwash filter
AX5-WWF (Included)
-  Spigot (3/8" & 1/4"-20 threads)
AX1-BLT
-  Charging case
AX5-CHRSE

Electrical

Battery
LG Chem Lithium-ion

Battery Lifetime
70% after 300 cycles



LED Lifetime
50.000 Hours

Charging time (nominal)
5 Hours

Input Voltage
90-264V 47-63Hz

Input Current
1.2A/115VAC ~ 1.0A/230VAC

Inrush Current
Cold start 30A/115VAC ~ 60A/230VAC

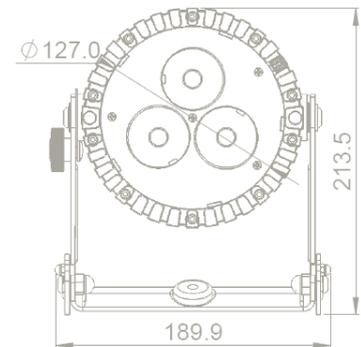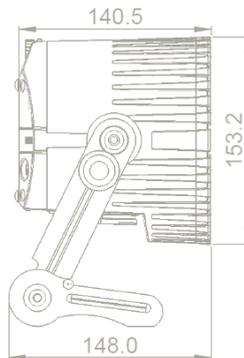

Control

Wireless Modules
865-870MHz
902-928MHz
2.4GHz

Range
300m | 330 Yards

DMX
Supports CRMX, W-DMX and XLR-DMX

